

# UTP2AUDIO Installation

UTP2AUDIO provides audio interface for external speakers for Yealink MVC, ZVC and UVC devices.


It provides line level output on 2xRCA and amplified 2x10W speaker output on 4 pole 5mm captive screw connector. Both output types are always active.

The unit connects to the PoE switch via CAT5e cable in the same way as the Yealink MSpeaker II.

Number of connected UTP2AUDIOs for your Yealink device reflects the same limitations as the MSpeaker II.

## Two scenarios:

- A. The 2xRCA output can be connected to your audio amplifier or active loudspeakers.

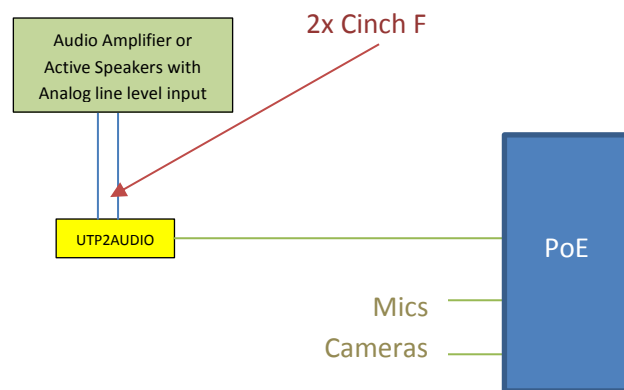

- B. The 4 pole 5mm captive screw connector (- + - +) can be connected directly to your loudspeakers. It is convenient for installations with ceiling loudspeakers. (10W 8Ohm)

